PlasmaSeries

60"- 1280 x 720p Resolution
40"- 640 x 480p Resolution

Input Signals:
60"- NTSC, VGA, SVGA, HD, XGA
40"- NTSC, VGA, SVGA, SD, HD

Peak Brightness:
60"- 180 cd/m^2
40"- 370 cd/m^2

Viewing Angle: 160°

Contrast Ratio:
60"- 330:1
40"- 500:1

Intelligent Image Scaling

Luminance Enhancement

Optional Speakers (2 x 10 Watts)

Remote Control

Aspect Ratio Correction: Normal, Wide, Zoom

Fan-Free, Noise Free (40"only)

60" Plasma Display
DPDP60W

40" Plasma Display
DPDP40V

zenith

DIGITIZE THE EXPERIENCE.™

zenith

Zenith Electronics Corporation
2000 Millbrook Drive, Lincolnshire, IL 60069
Internet: www.zenith.com
Sales/Marketing 1-800-884-1742
Technical Assistance 1-888-865-3026

Dimensions and weights are approximate. Design and specifications subject to change without notice. These instruments are engineered and manufactured to comply with all applicable safety standards of Underwriters Laboratories, Inc. and Canadian Standards Association for x-radiation, fire, implosion and electrical shock. Availability and specifications are subject to change by manufacturer without notice.

©2001 Zenith Electronics Corporation
Printed in U.S.A. ZPDPD801

PlasmaSeries

	DPDP60W	DPDP40V
Feature Level		
Screen Size	60W 16:9 Monitor	40V 4:3 Monitor
Transmitter	SC3260	SC352
Video Enhancements		
Display Native Resolution	1280 x 720p	640 x 480p
Pixel Pitch	0.343 mmH x 1.032 mmV	0.419 mmH x 1.2522 mmV
Aspect Ratio	16:9, 4:3	4:3
Peak Brightness	180 cd/m (w/Screen Filter 45%) - 450 cd/Based on PDP Module	370 cd/m²
Contrast Ratio	330:1	500:1
Twin Picture, PIP	Yes	N/A
Viewing Angle	160°	160°
Format Conversion	Intelligent Image Scaling to 1280 x 720p (Inside PDP Monitor)	Intelligent Image Scaling
Aspect Ratio Correction	Yes-(16:9, 4:3, zoom)	Yes-(16:9, 4:3, zoom)
Color Temperature	8,000K	8,000K
Display		
Display Frequency	15.73 to 68kHz(H), 50 to 120Hz(V)	15.73 to 64kHz(H), 50 to 120Hz(V)
PLE (Peak Luminance Enhancement)	Yes	Yes
Displayable Colors	16.77 Million	16.77 Million
Color Gradation Filter	Yes	Yes
Input Signal	NTSC, HD, VGA, SVGA, XGA, SXGA	NTSC, SD, VGA, SVGA, HD
Display Modes	Normal, Wide, Zoom	Normal, Wide, Zoom
Panels (Gray Bars for 4:3 display)	Yes	Yes-(in 16:9 display)
Picture Controls		
Contrast	Yes	Yes
Brightness	Yes	Yes
Color	Yes	Yes
Tint	Yes	Yes
Sharpness	Yes	Yes
Audio Enhancements		
Auto Sound	DASP Menu: Flat, Sports, Cinema, Music, User	DASP Menu: News, Cinema, Music, Sports, User
AVL	Yes	No
Mono/Stereo/MTS/SAP	Mono/Stereo	Stereo
Bass/Treble/Balance	Yes	Yes
Total Audio (Watts)	2 x 10 Watts	2 x 10 Watts
Speaker	Optional-(D60DVSA)	Optional-(H40DVSA)
Speaker Stand	Optional-(D60DVSAS)	Optional-(H40DVSAS)
Jack Pack		
RGB (VGA/HD-DBS) Control Interface Connector	(1) 15-Pin D-Type Connector	(1) 15-Pin D-Type Connector (1) 25-Pin RGB 12C
Hi-Res Component Video in Y, P_B, P_R	(1) Set	(1) Set
Audio L/R In/Loop Out	(2) Sets	(2) Sets
CVBS In/S-Video In	(1) Set/(1) Set	N/A
Cabinet Description		
Finish	Brushed Silver	Brushed Silver
Screen Protector	Included	Included
Control Panel	5 Buttons	5 Buttons

	DPDP60W	DPDP40V
Special Features		
Supplied Accessory	15-wire RGB Cable	15-wire RGB Cable
Acoustic Noise	Yes	Yes
PIP/POP (Features)	PIP (Main: PC60Hz/DTV, Sub; Video/DVD)	N/A
APC	Yes	Yes
DASP	Yes	Yes
Shock Absorbing Glass Damper	Yes- Allows tilting 0 to 20 degrees	Yes- Allows tilting 0 to 20 degrees
Fan Free, Noise Free	No	Yes
Auto-Power On	Yes	Yes
Discrete Power Off	Yes	Yes
Last Source On	Yes	Yes
Output Resolution		
NTSC, VGA, SVGA, XGA.	1280 x 720p	640 x 480p (only NTSC, VGA)
HDTV	1280 x 720p	640 x 480p (EDTV)
Menu System		
Trilingual Menus	Yes-(English, Spanish, French)	Yes-(English, Spanish, French)
Sleep Timer	Yes	Yes
Accessories		
Desktop Pedestal	Optional-(D60DVMS)	Optional-(H40DVMS)
Wall Mount	Optional	Optional
Ceiling Mount	Optional	Optional
Integrated Power Supply	Yes	Yes
Anti- Reflection Screen	Included PDP Screen Filter	Included PDP Screen Filter
Required Approvals		
UL, C-UL	Yes, FCC Class B	Yes, FCC Class B
Operating Environment		
Humidity Range	20-80%	20-80%
Altitude	2000m	2000m
Operating Temperature	0-40°C	0-40°C
Additional Info		
Power Consumption	750 Watts	350 Watts
Power Source	120v 60Hz	120v 60Hz
Operating Guide	Yes	Yes
Warranty		
Replacement Parts/Labor	1yr./1yr.	1yr./1yr.
Service Supplied	Module Level	Module Level

	DPDP60W	DPDP40V
Weights & Dimensions (Panel Only)		
Height	34.8"	28"
Width	57.3"	36.6"
Depth	3.9"	3.1"
Weight	154.3 lbs.	71.8 lbs.

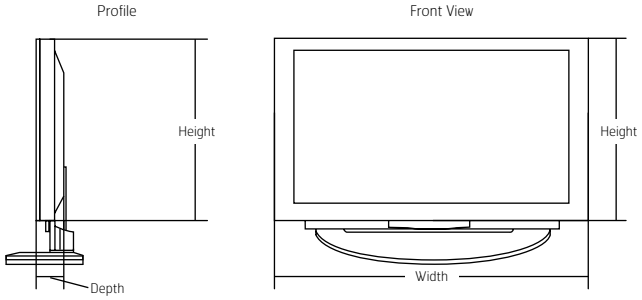

Jackpack

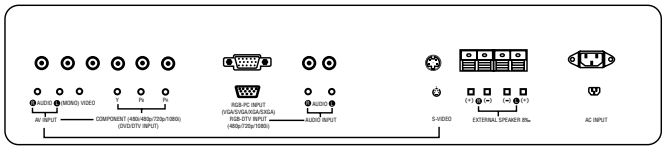

DPDP60W

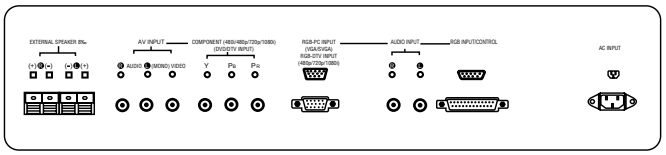

DPDP40V

Transmitter

DPDP60W

DPDP40V

Model SC3260

Model SC352